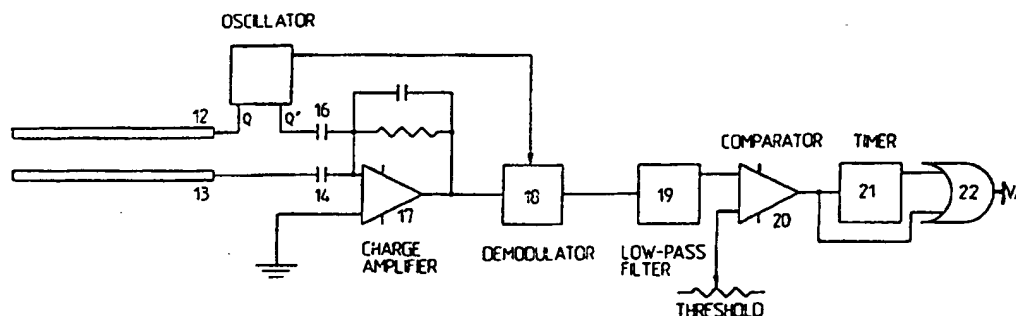


**PCT**WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>6</sup>:</b>  <b>G05B 1/02</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 97/37288</b>  <b>(43) International Publication Date:</b> 9 October 1997 (09.10.97)
<b>(21) International Application Number:</b> PCT/US97/05807  <b>(22) International Filing Date:</b> 27 March 1997 (27.03.97)  <b>(30) Priority Data:</b> 08/625,473                      29 March 1996 (29.03.96)                      US  <b>(71) Applicant (for TJ only):</b> NETZER, Yohay [US/IL]; 112 Yuvalim, 20142 (IL).  <b>(71)(72) Applicant and Inventor:</b> NETZER, Yishay [IL/IL]; 112 Yuvalim, 20142 (IL).  <b>(74) Agent:</b> FRIEDMAN, Mark, M.; c/o Sheinbein, Robert, 2940 Birchtree Lane, Silver Spring, MA 20906 (US).		<b>(81) Designated States:</b> AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>With international search report.</i>

**(54) Title:** A WINDOW CAPACITIVE MOISTURE SENSOR**(57) Abstract**

A method and apparatus for sensing condensed moisture on the inside of automotive windows (10) with essentially no sensitivity to precipitation on the outside of the window (10). The method is based on sensing the influence of the moisture on the impedance (mainly capacitive) between two electrodes (12, 13). It is intended especially for rear windows (10) where the sensing electrodes (12, 13) can be integrated with the resistive heater network (20) printed on the internal side and activate it automatically. Similarly it can be used for front windows (10) where it can automate the operation of electrical or hot-air defoggers.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LJ	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

WO 97/37288

PCT/US97/05807

## A Window Capacitive Moisture Sensor

### FIELD AND BACKGROUND OF THE INVENTION

The present invention relates to automotive window moisture sensors and, more particularly, to a moisture sensor especially suitable for sensing moisture on the inner surface of automobile windows, and for automatic activation of window heaters.

Automotive windshield moisture sensors have been introduced for automating the operation of windshield wipers. One such type of moisture sensor is based on electro-optical detection of raindrops by sensing changes in the total internal reflection of a light beam reflected off the front glass-air interface. A typical moisture sensor of this type is described in US Patent No. 4,859,867.

An alternative method of sensing moisture on the windshield surface relies on the relatively large dielectric constant ( $\sim 80$ ) of water as it affects the capacitance between a set of conductive electrodes deposited on the windshield. Moisture sensors based on this method are integral with the windshield and are potentially less expensive and less conspicuous than optical moisture sensors. Two such moisture sensors are described in US Patents Nos. 4,805,070 and 4,831,493, in which the electrodes are coated on the outside surface of the windshield, leaving the electrodes exposed to abrasion by the combined effect of the wiper motion and airborne particles.

In an attempt to overcome this weakness it was suggested that the conductive electrodes be deposited between the glass laminates of the windshield. Typical moisture sensors of this type are described in US Patent No. 3,826,979, US Patent No. 4,703,237, in US Patent No. 4,827,198, in US Patent No. 4,613,802, and in US Patent No. 4,554,493. However, the dielectric glass layer that separates the sensing electrodes from the water droplets decreases the moisture signal to such an extent that the moisture signal is very small compared to parasitic signals that result from temperature effects and mechanical stresses in the glass. If these parasitic signals were constant, they would result in a fixed offset sensor output error. Since the dielectric constant of the glass is temperature dependent, for example, resulting in a varying offset error, the parasitic effects should be suppressed as much as possible.

WO 97/37288

PCT/US97/05807

## 2

An additional shortcoming of prior art capacitive moisture sensors is their sensitivity to moisture on both sides of the windshield, i.e., they do not distinguish between moisture on the external surface of the windshield and moisture on the internal surface of the windshield.

The fact that prior art capacitive windshield moisture sensing failed to provide a viable solution to sensing moisture on the outer surface of the windshield is probably one of the reasons why capacitive moisture sensors were not even considered for other applications, such as sensing moisture on the internal surface of automotive windows for automating the operation of window heaters and hot-air defoggers. In this application the sensor would be safe from windshield abrasion, and its sensitivity would not have to be compromised by burying the electrodes between the window layers.

It is an object of the invention to provide a capacitance-type moisture sensor suitable for sensing moisture on the inner surface of an automobile window.

It is another object of the invention to provide a capacitance type moisture sensor that can be applied simultaneously in the same process with the window resistive heater network.

It is a further object of the invention to provide a window capacitive moisture sensor which is insensitive to the presence of moisture on the other, unsensed, second side of the window.

It is a further object of the invention to provide a capacitive moisture sensor for automatically activating window heaters or defoggers.

### SUMMARY OF THE INVENTION

The invention provides an automotive window-moisture capacitive sensor with sensing electrodes on the internal side of the window which is substantially insensitive to precipitation on the outside of the window. The sensor is intended for rear windows. The sensing electrodes can be integrated with the window heater network, and can automatically activate the window heater network through a control circuit.

The inner surface moisture sensor of the present invention can also be applied

WO 97/37288

PCT/US97/05807

## 3

to other windows, such as front windshields, where it can automate defogging by means of hot air or electrical heating.

The sensor of the present invention is applied to the window surface on which moisture is to be detected. Thus, there is no sensitivity problem, as in the prior art sensors, since being exposed on the surface of the window, the moisture signal level is orders of magnitude greater than in the buried electrode case. Thus, the time-varying, temperature-varying, stress-dependent parasitic coupling through the glass dielectric is insignificant. Further, due to the high signal levels, there is no problem of parasitic capacitance, and no need for differential-input electronics or other precautions, like shielding. The charge amplifier, 17, should be conveniently located somewhere nearby on the edge of the window, where it will provide substantially no obscuration of the driver's field of view, and the rest of the signal processing electronics may be located in the same small module.

#### BRIEF DESCRIPTION OF THE DRAWINGS

The invention is herein described, by way of example only, with reference to the accompanying drawings, wherein:

FIG. 1 is a top view of a typical capacitive sensor.

FIG. 2 illustrates a typical block diagram of the moisture sensor system.

FIG. 3A is a side view of the moisture sensor.

FIG. 3B is a side view of the moisture sensor with a shield layer.

FIG. 4 illustrates an integrated sensor and heater.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

FIG. 1 illustrates a schematic top view of a typical moisture sensor according to the present invention. The moisture sensor includes two electrodes, 12 and 13. Electrode 12 is excited by an alternating voltage source, 15, with a typical frequency of 10 kHz. The electrodes are coated on the window, 10. The electrodes may be

WO 97/37288

PCT/US97/05807

4

made from any conductive material, such as vacuum deposited thin film, a silk-screen printed thick film, etc.. Electrode, 13, the signal electrode, collects the capacitively induced current as determined by the geometry of the electrodes and the medium around them, wherein the medium includes the glass window, 10, air, and, possibly, a moisture layer.

FIG. 2 illustrates a typical block diagram of the moisture sensor system. Oscillator 15 generates two complementary alternating voltages, Q and Q'. Voltage Q is applied to the excitation electrode, 12, and voltage Q' is applied to a fixed capacitor, 16, whose value nominally equals the capacitance,  $C_{\text{sensor}}$ , between electrodes 12 and 13 in their "dry" condition. When the electrodes are wet, the capacitance,  $C_{\text{sensor}}$ , increases due to the dielectric nature of water. In practice, the water may not be pure because of soil, salt spray, etc. and the impedance between the electrodes may include a resistive component which, combined with any DC component of the excitation voltage, could overload the amplifier. For this reason electrode 13 is coupled to the amplifier input through coupling capacitor 14. Since capacitor 16 nominally equals  $C_{\text{sensor}}$ , the net current flowing into the virtual ground input of the charge-amplifier, 17, as well as the amplifier output voltage, are zero. In practice, due to manufacturing tolerances, there may be some fixed output signal even in the dry condition. This fixed output signal may be eliminated by a calibration during manufacturing.

The rest of the signal conditioning of the moisture sensor is as follows:

Demodulator 18 converts the alternating output signal of charge amplifier 17 into a unipolar voltage that is smoothed and converted into a DC voltage by low-pass filter 19. The operation of the demodulator is conventional and is based on switching its gain from -1 to +1 synchronously with excitation source 15. The output of low-pass filter 20, which depends on the thickness of the moisture layer, is compared by comparator 20, to a preset threshold voltage to generate a logic level output. The logic level output may serve as the command signal to the window heater, or defroster system. To guarantee stable transitions comparator 20 preferably includes a specific

WO 97/37288

PCT/US97/05807

## 5

amount of hysteresis. The sensor system also includes a timer, 21, the purpose of which is explained below.

Theoretically, the sensor, as shown in FIG. 1, would be sensitive to moisture on both sides of the glass window, 10, since rain drops on the second (external) side of the window will affect the sensor capacitance as well as moisture on the active side (internal to the vehicle). Such sensitivity is undesirable, but it was found that there is a way to control it, to make it insignificantly small. This is based on the fact that the lateral separation,  $d$ , between electrodes 12 and 13 affects both the desired sensitivity to moisture on the internal side of the window and the undesirable sensitivity to water on the external side. The sensitivity to moisture on the internal side of the window is proportional to the field intensity between the electrodes, i.e., it is roughly proportional to  $1/d$  as illustrated in the cut-away view in FIG. 3A. The sensitivity to moisture on the external side of the window depends on fringing field lines at a distance,  $D$ , from the electrodes, which is roughly proportional to  $d/D$ . The density of these lines of force is further diminished by the shunting effect of the (dielectric) glass. The ratio of the two sensitivities is therefore proportional to  $D/d^2$ , i.e., inversely proportional to the square of the separation,  $d$ . It was found that this ratio is about  $1/20$  for  $D=5\text{mm}$  and  $d=1\text{mm}$ . The width of the electrodes is relatively unimportant in determining the sensitivity to moisture on the unsensed surface of the window.

In another variation, shown in FIG. 3B, a shield electrode, 51, may be incorporated on a surface the internal laminate layer, 52, of laminated automobile window sandwich glass, 510, to provide complete insensitivity to moisture on the unsensed surface, 50, of the window.

FIG. 4 illustrates a typical integrated heater network and sensor, including a patterned heater element, 20, and two sensor electrodes, 12 and 13. The two sensor electrodes are parallel to the adjacent heater lines, and equally distant from the adjacent heater lines. The reason for this is that in the presence of moisture on the internal side of the window, the heater first evaporates the moisture near the heater lines, while the areas last to be dried are in the shape of lines parallel and between the

WO 97/37288

PCT/US97/05807

## 6

heater lines. If the sensing electrodes are situated in this area they will sense the presence of the remaining moisture until the evaporation is complete. To assure complete evaporation, it is desirable that the heater remain on for a certain amount of time after comparator 20 switches to the low state. The low state indicates the absence of moisture. This is achieved by timer 21, which is activated by the transition of comparator 20 to the low state. Combining the comparator and timer outputs with an OR-gate 22 provides a heating command with an extra duration that guarantees a complete drying. The extra duration is the time delay provided by the time-out of timer 20, providing a heater turn-off delay.

It would be obvious to those skilled in the art that the number of electrodes as well as their geometry can be changed within the scope of the invention.

Further, the inner-surface window-moisture sensor of the present invention may be combined with other moisture sensors, to provide a complete moisture-sensing system. For example, the inner surface moisture sensor of the present invention may also be used in conjunction with prior art moisture sensors, such as the optical moisture sensors described above.

Also, the sensor electronics may be modified as necessary to suit various applications.

While the invention has been described with respect to a limited number of embodiments, it will be appreciated that many variations, modifications, and other applications of the invention may be made.



WO 97/37288

PCT/US97/05807

7

## WHAT IS CLAIMED IS:

1. An capacitive moisture sensor for sensing moisture on a surface of a dielectric, which capacitive moisture sensor is insensitive to the presence of moisture on the other unsensed side of the dielectric, the capacitive moisture sensor comprising

- (a) at least one pair of capacitive electrode plates coated on the surface of the dielectric on which moisture is to be sensed, said at least one pair of capacitive electrode plates including at least one pair of excitation and signal capacitive electrode plates ;
- (b) electronic circuitry for substantially ignoring a resistive component of impedance between said electrode plates.

2. A moisture sensor as in claim 1, wherein the moisture sensor is made insensitive to moisture on the other unsensed side of the dielectric by controlling the lateral separation between said sensor electrodes.

3. A moisture sensor as in claim 1, wherein the dielectric is sandwich glass having an internal laminate layer, said moisture sensor insensitive to moisture on the other unsensed side of the dielectric including an electrically conductive shield layer on a surface of said internal laminate layer of said sandwich glass.

4. A window moisture sensing and evaporating system including an capacitive moisture sensor for sensing moisture on a surface of a window, which moisture sensor is insensitive to the presence of moisture on the other unsensed side of the window, comprising

- (a) an electrical heater element on a window surface; and,
  - (b) the moisture sensor including at least two capacitive electrodes, including at least one each excitation and signal capacitive electrode plates, on the surface of the window on which moisture is to be sensed,
- the moisture sensor for use for the control of said electical heater element.

WO 97/37288

PCT/US97/05807

## 8

5. A moisture sensor system as in claim 2, said capacitive electrodes having a lateral separation,  $d$ , wherein said moisture sensor is made insensitive to moisture on the other unsensed side of the dielectric, the dielectric having a thickness  $D$ , by controlling the ratio,  $D/d^2$ , of said thickness,  $D$ , of the dielectric, to  $d^2$ , the square of said lateral separation,  $d$ , between said capacitive electrodes.

6. A moisture sensor system as in claim 5, further comprising sensor electronics circuitry to activate said heater when moisture is sensed, said electronics circuitry including a turn-off delay to assure complete evaporation of moisture on the sensed surface.

7. An apparatus for sensing moisture on a surface of a window, in which the moisture sensing is insensitive to the presence of moisture on the other unsensed side of the window, comprising

- (a) a moisture sensor including at least one pair of capacitive electrode plates including at least one pair of excitation and signal capacitive electrode plates coated on the moisture sensed surface of a window;
- (b) signal conditioning electronic circuitry for use with said moisture sensor which provides a logic output when moisture is present.

8. A moisture sensing apparatus as in claim 7, wherein said moisture sensor is made insensitive to moisture on the other unsensed side of the window by controlling the lateral separation between said excitation and signal capacitive electrode plates.

9. A moisture evaporation apparatus, including sensing moisture on a surface of a window, in which the moisture sensing is substantially insensitive to the presence of moisture on the other unsensed side of the window, comprising

WO 97/37288

PCT/US97/05807

9

- (a) a moisture sensor including at least one pair of capacitive electrode plates including at least one pair of excitation and signal capacitive electrode plates coated on the moisture sensed surface;
- (b) sensor signal conditioning electronic circuitry which provides a logic output when moisture is present;
- (c) a window heater;

said moisture sensor integrated with said window heater by simultaneous application of said moisture sensor to the window in the same coating process as said heater; said heater operation controlled by use of said logic output.

10. A moisture evaporation apparatus as in claim 9, wherein said moisture sensor is made insensitive to moisture on the other unsensed side of said window by controlling the lateral separation between said sensor electrodes.

11. A moisture evaporation apparatus as in claim 9, said sensor conditioning circuitry including a timer providing additional heater on time to assure complete evaporation.

12. A moisture sensor as in claim 2 applied on the inside of the front window in a motor vehicle for automating the operation of a window defogger/heater.

13. A moisture sensor as in claim 2 applied on the inside of the rear window in motor vehicle for automating the operation of a window heater.

14. A moisture sensor system as in claim 9, wherein the window is sandwich glass having an internal laminate layer, said moisture sensor including an electrically conductive shield layer on a surface of said internal laminate layer of said sandwich glass.

WO 97/37288

PCT/US97/05807

10

15. A capacitive moisture sensor as in claim 1, having excitation and signal capacitive electrode plates, further comprising

- (a) an alternating excitation source connected to the excitation capacitive electrode plate;
- (b) the signal electrode plate for collecting capacitively induced signal connected to an amplifier which provides an amplified capacitively induced signal; and,
- (c) a synchronous demodulator coupled to the signal electrode plate for synchronously demodulating said amplified capacitively induced signal synchronously with said alternating excitation source.

16. A capacitive moisture sensor as in claim 15, having a sensitivity to moisture on the surface of the window on which moisture is to be sensed, the window having a thickness,  $D$ , further comprising

separating said excitation and signal capacitive electrode plates by a distance,  $d$ , thereby resulting in a fringing field on the other unsensed side of the window roughly proportional to  $d/D$ ,

thereby resulting in a ratio of said sensitivity to moisture on the surface of the window on which moisture is to be sensed, to said sensitivity to moisture on the other unsensed side of the window, roughly proportional to  $D/d^2$ .

17. A capacitive moisture sensor as in claim 1, wherein said electronic circuitry for substantially ignoring a resistive component of impedance between said electrode plates includes a synchronous demodulator.

WO 97/37288

PCT/US97/05807

1/4

FIG. 1


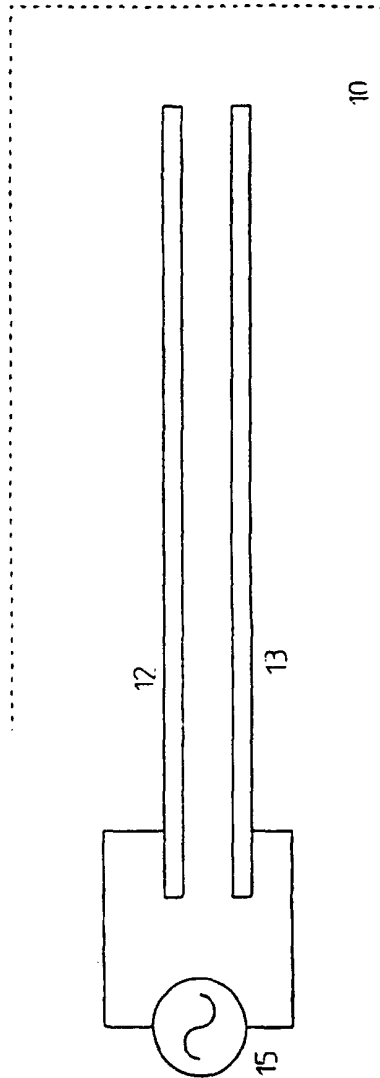


FIG. 2

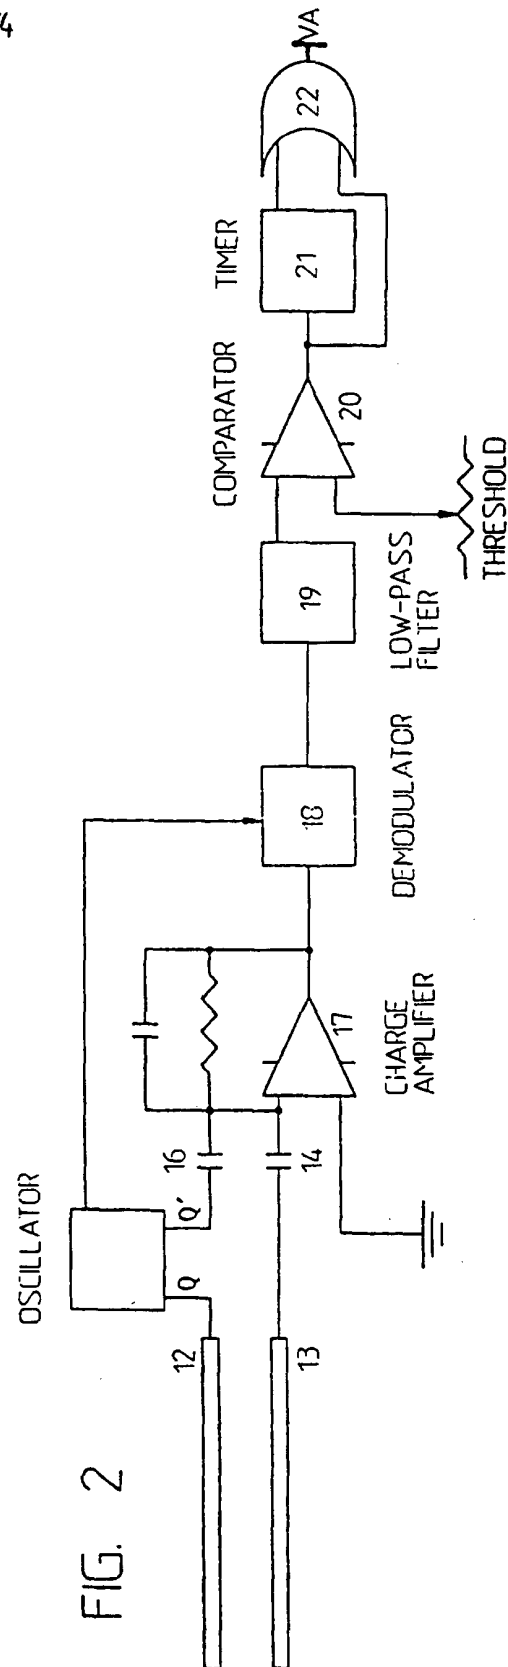

WO 97/37288

PCT/US97/05807

2/4


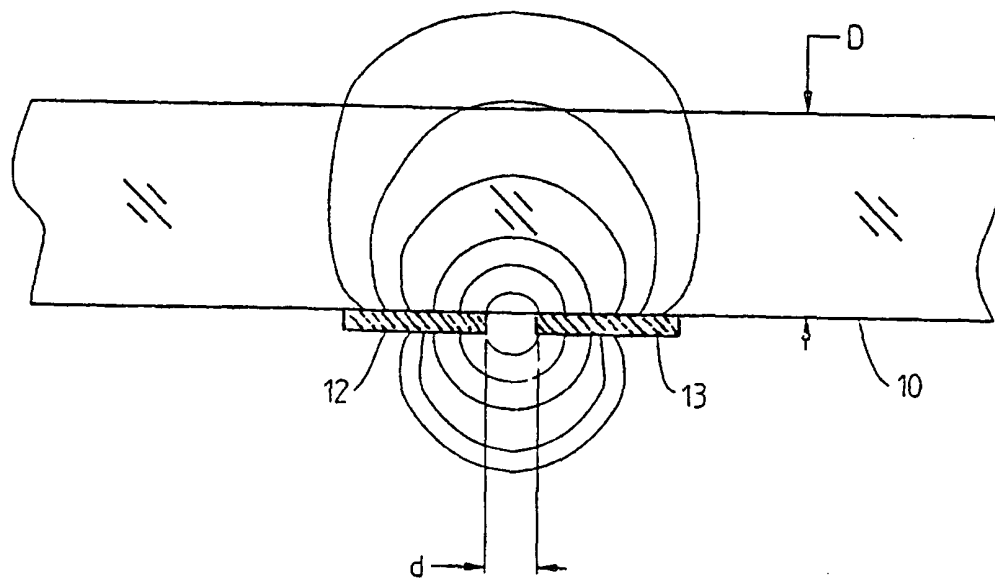


FIG. 3A

WO 97/37288

PCT/US97/05807

3/4

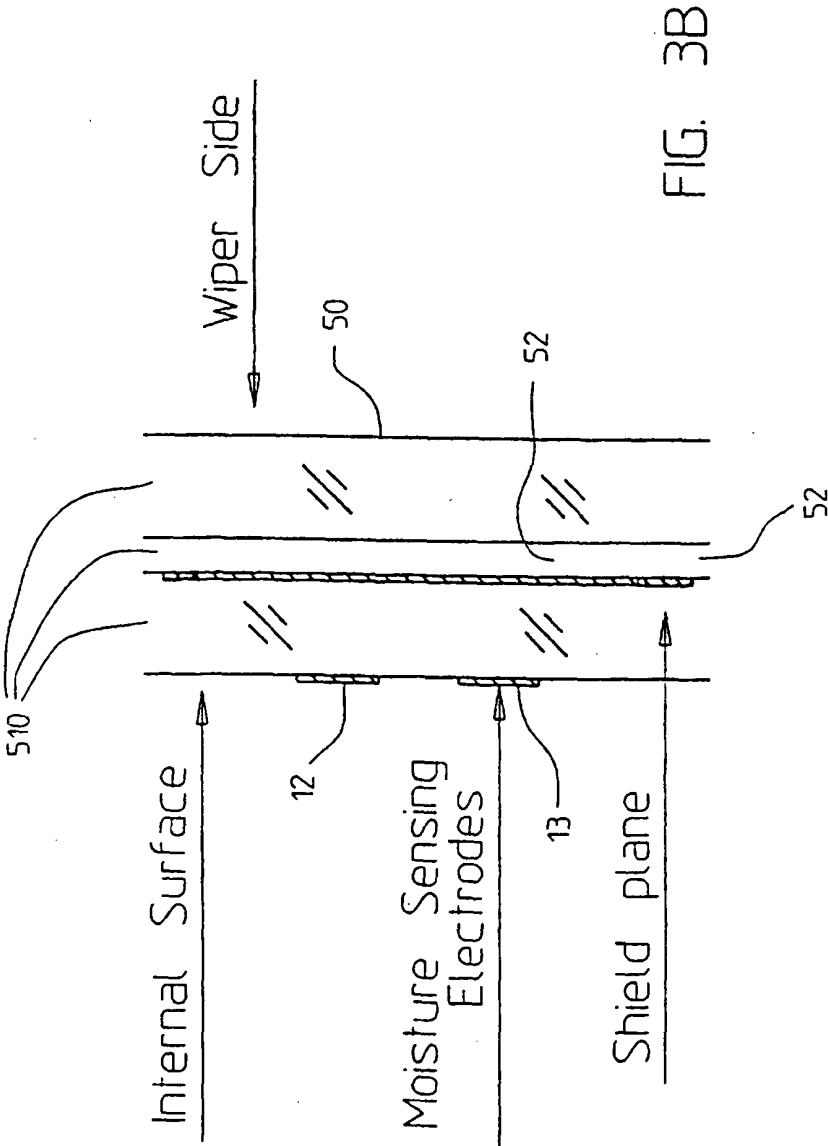

WO 97/37288

PCT/US97/05807

4/4

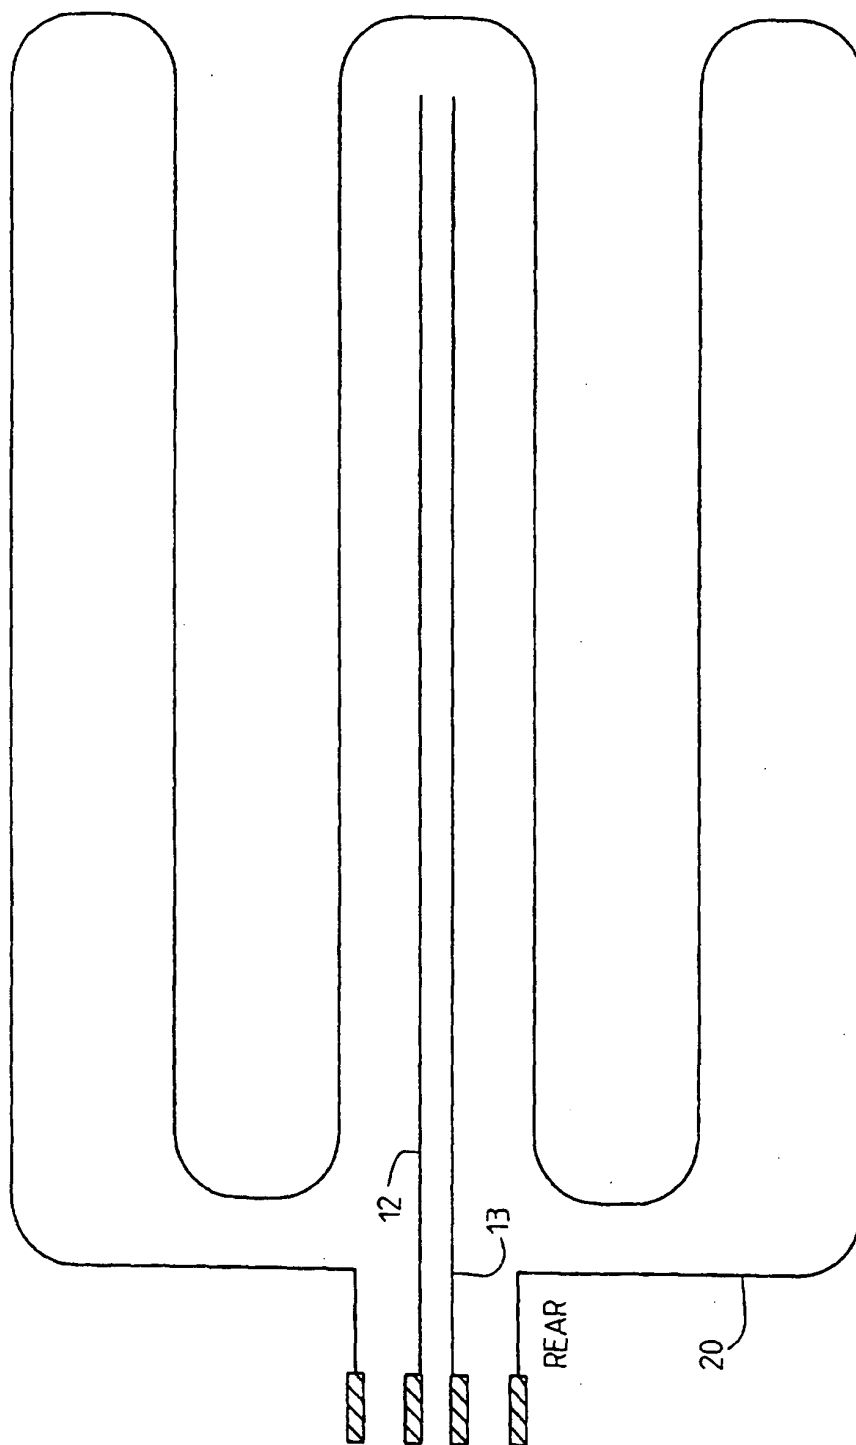


FIG. 4



## INTERNATIONAL SEARCH REPORT

 International application No.  
PCT/US97/05807

<b>A. CLASSIFICATION OF SUBJECT MATTER</b>																				
IPC(6) : G05B 1/02																				
US CL : Please See Extra Sheet.																				
According to International Patent Classification (IPC) or to both national classification and IPC																				
<b>B. FIELDS SEARCHED</b>																				
Minimum documentation searched (classification system followed by classification symbols)																				
U.S. : 307/10.1, 118, 141.4, 219/202,203,522; 52/171.2, 318/483; 361/286,191;340/602																				
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched																				
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)																				
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>																				
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.																		
X	US 4,805,070 A (KOONTZ ET AL) 14 FEBRUARY 1989, SEE	7-10,14																		
---	ENTIRE DOCUMENT.	---																		
Y		11																		
Y	US 4,520,258 A (GROHMANN) 28 MAY 1985, SEE ENTIRE	11																		
	DOCUMENT.																			
A	US 4,032,745 A (ROSELLI) 28 JUNE 1977, SEE ENTIRE	1-17																		
	DOCUMENT.																			
A	US 4,196,338 A (EDEL) 01 APRIL 1980, SEE ENTIRE	1-17																		
	DOCUMENT																			
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/> See patent family annex.																				
<table border="0"> <tr> <td>* Special categories of cited documents:</td> <td>*T</td> <td>later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</td> </tr> <tr> <td>*A* document defining the general state of the art which is not considered to be of particular relevance</td> <td>*X*</td> <td>document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</td> </tr> <tr> <td>*E* earlier document published on or after the international filing date</td> <td>*Y*</td> <td>document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</td> </tr> <tr> <td>*L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reasons (as specified)</td> <td>*Z*</td> <td>document member of the same patent family</td> </tr> <tr> <td>*O* document referring to an oral disclosure, use, exhibition or other means</td> <td></td> <td></td> </tr> <tr> <td>*P* document published prior to the international filing date but later than the priority date claimed</td> <td></td> <td></td> </tr> </table>			* Special categories of cited documents:	*T	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention	*A* document defining the general state of the art which is not considered to be of particular relevance	*X*	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone	*E* earlier document published on or after the international filing date	*Y*	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art	*L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reasons (as specified)	*Z*	document member of the same patent family	*O* document referring to an oral disclosure, use, exhibition or other means			*P* document published prior to the international filing date but later than the priority date claimed		
* Special categories of cited documents:	*T	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention																		
*A* document defining the general state of the art which is not considered to be of particular relevance	*X*	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone																		
*E* earlier document published on or after the international filing date	*Y*	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art																		
*L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reasons (as specified)	*Z*	document member of the same patent family																		
*O* document referring to an oral disclosure, use, exhibition or other means																				
*P* document published prior to the international filing date but later than the priority date claimed																				
Date of the actual completion of the international search		Date of mailing of the international search report																		
05 JUNE 1997		08 JUL 1997																		
Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231		Authorized officer																		
Facsimile No. (703) 305-3230		RICHARD F. [Signature]																		
		Telephone No. (703) 308-2816																		

**INTERNATIONAL SEARCH REPORT**

International application No.

PCT/US97/05807

**A. CLASSIFICATION OF SUBJECT MATTER:**  
**US CL :**

307/10.1, 118, 141.4, 219/202,203,522; 52/171.2, 318/483; 361/286,181;340/602